


Hermetic Line M

N
New

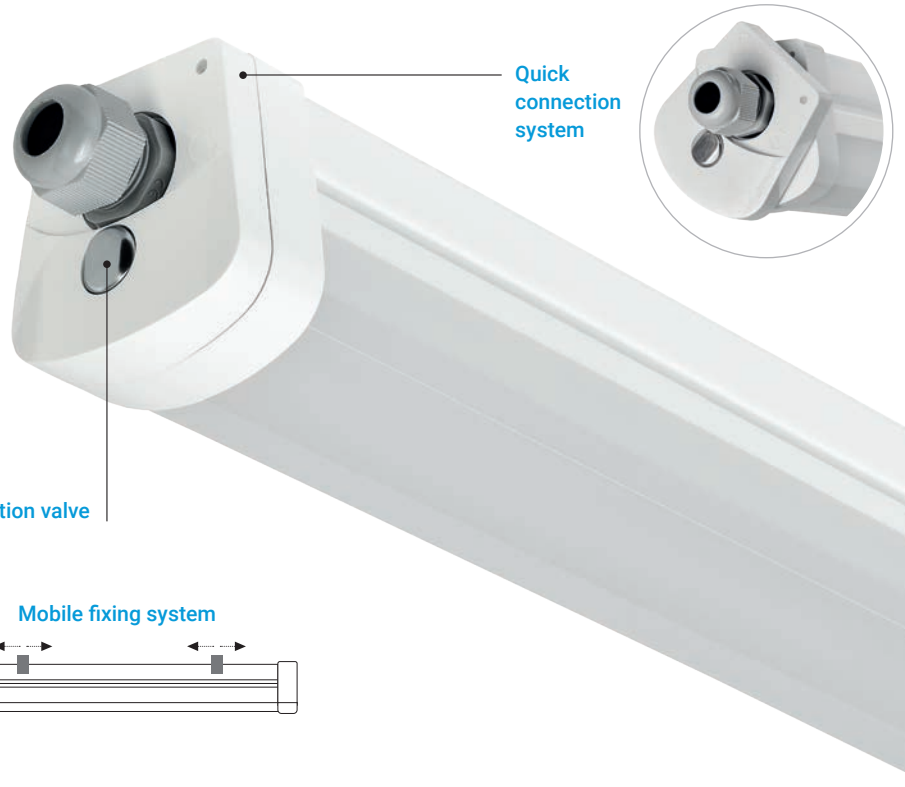

Hermetic Line M is the new IP65 fitting from Normalit.


Made on white polycarbonate and with opal diffuser, it is available in three different lengths:

- DM2: 600mm
- DM4: 1200mm
- DM5: 1500mm


Anti condensation valve

Incorporates a fixation system using metal clips that can slide on the body of the luminaire to give different installation options.

Mobile fixing system



Quick and easy access to the connection terminal block.



Hermetic Line M	
Installation	Ceiling surface mounted Wall surface mounted
Diffuser	●
Light source	LED
Photobiological safety	0
UGR	22
CRI	>80
MacAdam ellipse	3
Beam angle range	140
Power range (W)	9,1-36,4
Colour temperature (°K)	4000
Light range	1710-6500
Power factor	0,95
Efficiency (%)	83
Expectancy	50000 h L70B50
DALI Option	-
Continuous function 24h	✓
IP	65
IK	08
Class	I


● Opal diffuser
BODY RAL 9016



Ceiling surface mounted



Wall surface mounted



IP 65

IK 08

CRI >80

UGR 22

140°



Expectancy
50000 h.
L70B50

Efficiency (%)
83

Photobiological safety

RG0	0 Risk free
RG1*	Low risk
RG2	Moderate risk
RG3	High risk

* Time under 3h.



○ RAL 9016

THREE DIFFERENT LENGTHS

L = 600
DM2

L = 1200
DM4

L = 1500
DM5



	W	K	LUMEN	COLOUR	L(mm)	⚡
LED DM2L	1x9,1W	4000	1710 lm	○	600	0,9
LED DM2H	1x13,6W	4000	2500 lm	○	600	0,9
LED DM4L	1x18,2W	4000	3420 lm	○	1200	1,8
LED DM4H	1x27,3W	4000	5000 lm	○	1200	1,8
LED DM5L	1x27,3W	4000	5130 lm	○	1500	2,0
LED DM5H	1x36,4W	4000	6500 lm	○	1500	2,0

