




New



Blok Avant

BLOK AVANT is an industrial fitting designed to light open areas. It has different optics to achieve a maximum save in number of luminaires and power

Includes analogic 1-10V regulation.

A system of interchangeable lenses and an alluminium reflector are available as accessories.

Three different optics available:

- Intensive (60°)
- Medium (90°)
- Extensive (120°)

BLOK AVANT + BKLN



BLOK AVANT + REFLECTOR



Blok Avant

Luminaire protected against overvoltage (up to 4kV)

Installation	Ceiling suspended (eyebolt included) Ceiling/Wall mounted (BKLN accessory for surface mounting is necessary)
Diffuser	☼
Light source	LED
Photobiological safety	1
UGR	22
CRI	>80
MacAdam ellipse	3
Beam angle range	60-120
Power range (W)	90,9-181,8
Colour temperature (°K)	4000 5700
Light range	15000-30070
Power factor	0,96
Efficiency (%)	94,54
Expectancy	50000 h L70B10
DALI Option	-
Continuous function 24h	✓
IP	67
IK	07-08
Class	I

☼ PMMA lens

Includes an IP68 waterproof linear 3 pole connector

IP68 two pole connector for 1-10V regulation not provided.

! For other CRI values, please contact us.

! INCLUDES ANALOGIC 1-10V REGULATION


Blok Avant



Ceiling suspended mounted



Ceiling/Wall surface mounted



IP 67

IK 07-08

4 kV

CRI >80

UGR 22



60-120°

Expectancy
50000 h.
L70B10

Photobiological safety


RG0	Risk free
RG1*	1 Low risk
RG2	Moderate risk
RG3	High risk

*Time under 3 h.




● RAL 9011: TEXTURIZED


Intensive optics



Medium optics



Extensive optics



	W	K	LUMEN	OPTICS	COLOUR	LM
BK100-4SN	1x90,9W	4000	15000 lm	60° Intensive	●	4,1
BK100-4MN	1x90,9W	4000	15000 lm	90° Medium	●	4,1
BK100-4FN	1x90,9W	4000	15000 lm	120° Extensive	●	4,1
BK100-5SN	1x90,9W	5700	15030 lm	60° Intensive	●	4,1
BK100-5MN	1x90,9W	5700	15030 lm	90° Medium	●	4,1
BK100-5FN	1x90,9W	5700	15030 lm	120° Extensive	●	4,1
BK150-4SN	1x136,4W	4000	22500 lm	60° Intensive	●	4,1
BK150-4MN	1x136,4W	4000	22500 lm	90° Medium	●	4,1
BK150-4FN	1x136,4W	4000	22500 lm	120° Extensive	●	4,1
BK150-5SN	1x136,4W	5700	22550 lm	60° Intensive	●	4,1
BK150-5MN	1x136,4W	5700	22550 lm	90° Medium	●	4,1
BK150-5FN	1x136,4W	5700	22550 lm	120° Extensive	●	4,1
BK200-4SN	1x181,8W	4000	30000 lm	60° Intensive	●	4,1
BK200-4MN	1x181,8W	4000	30000 lm	90° Medium	●	4,1
BK200-4FN	1x181,8W	4000	30000 lm	120° Extensive	●	4,1
BK200-5SN	1x181,8W	5700	30070 lm	60° Intensive	●	4,1
BK200-5MN	1x181,8W	5700	30070 lm	90° Medium	●	4,1
BK200-5FN	1x181,8W	5700	30070 lm	120° Extensive	●	4,1



Includes an IP68 waterproof linear 3 pole connector

Blok Avant


ACCESSORIES

		COLOUR
BK060L	Opening angle lens 60°	
BK090L	Opening angle lens 90°	
BK120L	Transparent glass 120° opening angle	
BK060R	Opening angle reflector 60°	Ⓐ
BK090R	Opening angle reflector 90°	Ⓐ
BKLN	Accessory for surface mounting	●
1029L2VP	2 metres long suspension accessory	
1029L4VP	4 metres long suspension accessory	
REGBORTEK2UI	2 pole linear waterproof connector	


OPENING ANGLE




GLASS



REFLECTOR

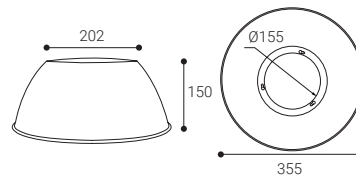

BKLN



1029L2

