




Hermetic Line

HERMETIC LINE is a watertight IP66 luminaire. It is ideal for basements, garages or any industrial activity.

The extruded polycarbonate body can be adjusted to any length.


It is possible to install them in line thanks to the wire entry in both sides.



Hermetic Line

Installation	Ceiling surface mounted Wall surface mounted
Diffuser	○
Light source	LED
Photobiological safety	0
UGR	22
CRI	>80
MacAdam ellipse	3
Beam angle range	110
Power range (W)	13,4-57
Colour temperature (°K)	4000
Light range	1680-7740
Power factor	0,95
Efficiency (%)	78,4
Expectancy	72000 h L70B10
DALI Option	✓
Continuous function 24h	✓
IP	66
IK	09
Class	I

○ Opal diffuser

 For other CRI values, please contact us.


Hermetic Line



Ceiling surface mounted



Wall surface mounted



IP 66

IK 09

CRI >80

UGR 22

110°

Expectancy
72000 h.
L70B10


Efficiency (%)
78,4

Photobiological safety

RG0	0 Risk free
RG1*	Low risk
RG2	Moderate risk
RG3	High risk

*Time under 3 h.

● RAL7001

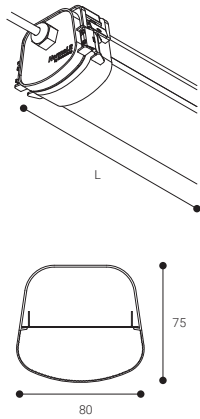


CONNECTION ON ONE SIDE

	W	K	LUMEN	COLOUR	L(mm)	⚙️
DLN2L	1x13,4W	4000	1680 lm	●	690	1,3
DLN2H	1x19W	4000	2580 lm	●	690	1,3
DLN4L	1x26,8W	4000	3360 lm	●	1250	2,5
DLN4H	1x38W	4000	5160 lm	●	1250	2,5
DLN5L	1x33,5W	4000	4200 lm	●	1530	3,1
DLN5H	1x47,5W	4000	6450 lm	●	1530	3,1
DLN6L	1x40,2W	4000	5040 lm	●	1810	3,7
DLN6H	1x57W	4000	7740 lm	●	1810	3,7

CONNECTION ON BOTH SIDES (LINEAR INSTALLATION)

Opal diffuser



	W	K	LUMEN	COLOUR	L(mm)	⚙️
DL2L	1x13,4W	4000	1680 lm	●	690	1,3
DL2H	1x19W	4000	2580 lm	●	690	1,3
DL4L	1x26,8W	4000	3360 lm	●	1250	2,5
DL4H	1x37W	4000	5160 lm	●	1250	2,5
DL5L	1x33,5W	4000	4200 lm	●	1530	3,1
DL5H	1x47,5W	4000	6450 lm	●	1530	3,1
DL6L	1x40,2W	4000	5040 lm	●	1810	3,7
DL6H	1x57W	4000	7740 lm	●	1810	3,7



Compatible with **NormaLINK**



IP66 IN INTERIORS



CABLE ENTRY IN BOTH ENDS, POSSIBILITY OF LINEAR MOUNTING (EXCEPT REF. DLN- THAT ONLY HAS ONE CABLE ENTRY).

	W	K	LUMEN	COLOUR	L(mm)	⚙️
DL2LD	1x13,4W	4000	1680 lm	●	690	1,3
DL2HD	1x19W	4000	2580 lm	●	690	1,3
DL4LD	1x26,8W	4000	3360 lm	●	1250	2,5
DL4HD	1x37W	4000	5160 lm	●	1250	2,5
DL5LD	1x33,5W	4000	4200 lm	●	1530	3,1
DL5HD	1x47,5W	4000	6450 lm	●	1530	3,1
DL6LD	1x40,2W	4000	5040 lm	●	1810	3,7
DL6HD	1x57W	4000	7740 lm	●	1810	3,7