



New



Quick connection system



Anti condensation valve


# Hermetic Line M

Hermetic Line M is the new IP65 fitting from Normalit. Made on white polycarbonate and with opal diffuser, it is available in three different lengths:

- DM2: 600 mm
- DM4: 1200 mm
- DM5: 1500 mm

Incorporates a fixation system using metal clips that can slide on the body of the luminaire to give different installation options. Quick and easy access to the connection terminal block.

Mobile fixing system



## Hermetic Line M


Installation	Ceiling surface mounted Wall surface mounted
Diffuser	●
Light source	LED
Photobiological safety	0
UGR	22
CRI	>80
MacAdam ellipse	3
Beam angle range	140
Power range (W)	9,1-36,4
Colour temperature (°K)	4000
Light range	1710-6500
Power factor	0,95
Efficiency (%)	83
Expectancy	50000 h L70B50
DALI Option	-
Continuous function 24h	✓
IP	65
IK	08
Class	I

● Opal diffuser



For other CRI values, please contact us.

# Hermetic Line M



IP **65** IK **08**


CRI **>80** UGR **22** **140°**

Expectancy **50000 h.** Efficiency (%) **83**  
L70B50


Photobiological safety

RG0	0 Risk free
RG1*	Low risk
RG2	Moderate risk
RG3	High risk

\*Time under 3 h.

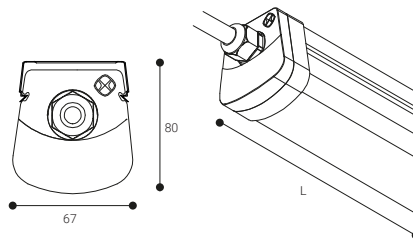

Opal diffuser



## THREE DIFFERENT LENGTHS

L = 600  
DM2

L = 1200  
DM4

L = 1500  
DM5



	W	K	LUMEN	COLOUR	L(mm)	⚡
<b>DM2L</b>	1x9,1W	4000	1710 lm	○	600	0,8
<b>DM2H</b>	1x13,6W	4000	2500 lm	○	600	0,8
<b>DM4L</b>	1x18,2W	4000	3420 lm	○	1200	0,8
<b>DM4H</b>	1x27,3W	4000	5000 lm	○	1200	0,8
<b>DM5L</b>	1x27,3W	4000	5130 lm	○	1500	0,8
<b>DM5H</b>	1x36,4W	4000	6500 lm	○	1500	0,8