



Hermetic XL

HERMETIC XL is a watertight (IP66) luminaire which is ideal for basements, garages or any industrial activity. Specifically designed with LED technology, it incorporates the new and revolutionary quick installation system which improves installation time and optimises maintenance work.

Hermetic XL


Installation	Ceiling surface mounted Wall surface mounted
Diffuser	○
Light source	LED
Photobiological safety	0
UGR	22
CRI	>80
MacAdam ellipse	3
Beam angle range	110
Power range (W)	13,4-28,5
Colour temperature (°K)	4000
Light range	1680-3870
Power factor	0,95
Efficiency (%)	80,1
Expectancy	72000 h L70B10
DALI Option	-
Continuous function 24h	✓
IP	66
IK	09
Class	II

○ Opal diffuser



For other CRI values, please contact us.

Hermetic XL



IP **66**

IK **09**

CRI **>80**

UGR **22**

110°

Expectancy
72000 h.
L70B10

Efficiency (%)
80,1


Photobiological safety

RG0	0 Risk free
RG1*	Low risk
RG2	Moderate risk
RG3	High risk


*Time under 3 h.

● RAL7001


DE2



DE3

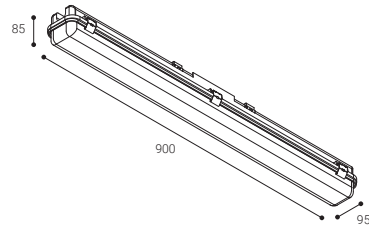


Opal diffuser



	W	K	LUMEN	COLOUR	
DE2L	1x13,4W	4000	1680 lm	●	1,2
DE2H	1x19W	4000	2580 lm	●	1,2
DE3L	1x20,1W	4000	2520 lm	●	1,8
DE3H	1x28,5W	4000	3870 lm	●	1,8

! DALI regulation available



! QUICK INSTALLATION



! For version for refrigerating chambers, please contact us.