



IQ

IQ is a range of recessed downlights with a simple, attractive and functional design, with square shape.

As an accessory, IQ has an extra embedding frame with different diameter, which makes it a very flexible solution when working with different hole diameters.

DALI regulation available.

TO SUBSTITUTE DICHOIC AND LED LAMPS.
CONTINUOUS WORK 24H GUARANTEED.

IQ

Installation	Ceiling recessed mounted
Diffuser	○
Light source	LED
Photobiological safety	1
UGR	19
CRI	>80
MacAdam ellipse	3
Beam angle range	61-63
Power range (W)	5,8
Colour temperature (°K)	3000 4000
Light range	670-700
Power factor	0,94
Efficiency (%)	91,3
Expectancy	60000 h L70B10
DALI Option	✓
Continuous function 24h	✓
IP	20-54
Class	II
Ideal cut out (mm)	79x79

○ Transparent diffuser



For other CRI values, please contact us.

IQ




Ceiling recessed mounted

LED CE RoHS 850°C

IP 20-54 CRI >80 UGR 19 61-63°

Expectancy 60000 h. L70B10 Efficiency (%) 91,3


Photobiological safety
 RG0 Risk free
 RG1* **1** Low risk
 RG2 Moderate risk
 RG3 High risk
*Time under 3 h.

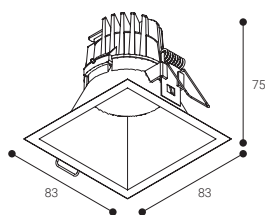

Ideal cut out **79x79**
Square cut

- RAL9016
- RAL7001
- RAL9005

Transparent diffuser



WITHOUT PHASE CUT REGULATION

	W	K	LUMEN	COLOUR	⚙️	PACKAGING
IQ03STB	1x5,8W	3000	670 lm	○	0,1	20
IQ03STN	1x5,8W	3000	670 lm	●	0,1	20
IQ04STB	1x5,8W	4000	700 lm	○	0,1	20
IQ04STN	1x5,8W	4000	700 lm	●	0,1	20


REGULATION BY PHASE CUT

	W	K	LUMEN	COLOUR	⚙️	PACKAGING
IQ03TB	1x5,8W	3000	670 lm	○	0,1	20
IQ03TN	1x5,8W	3000	670 lm	●	0,1	20
IQ04TB	1x5,8W	4000	700 lm	○	0,1	20
IQ04TN	1x5,8W	4000	700 lm	●	0,1	20



Compatible with **NormaLINK**

	W	K	LUMEN	COLOUR	⚙️	PACKAGING
IQ03DTB	1x5,8W	3000	670 lm	○	0,1	20
IQ03DTN	1x5,8W	3000	670 lm	●	0,1	20
IQ04DTB	1x5,8W	4000	700 lm	○	0,1	20
IQ04DTN	1x5,8W	4000	700 lm	●	0,1	20

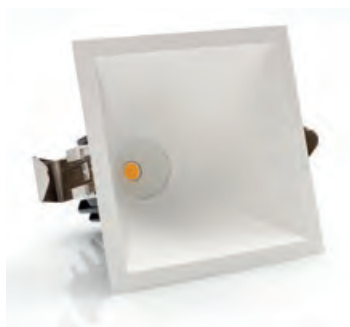

ACCESSORIES

Adapter

COLOUR
 IQAB ○
 IQAN ●

