



New

Kuiper

KUIPER is a compact recessed downlight with a diameter of 210mm and a height of 57mm. It has an aluminum heatsink, opal prismatic polycarbonate diffuser and ABS reflector. It is available in standard and DALI versions.

Kuiper

Installation	Ceiling recessed mounted
Diffuser	●
Light source	LED
Photobiological safety	0
UGR	22
CRI	>80
MacAdam ellipse	3
Beam angle range	105
Power range (W)	13
Colour temperature (°K)	3000-5000
Light range	1750-1880
Power factor	0,97
Efficiency (%)	61,8
Expectancy	72000 h L70B10
DALI Option	✓
Continuous function 24h	✓
IP	20-54
Class	II

● Opal diffuser



180-205mm cut out to replace standard 2 x 26w downlights



Kuiper



Ceiling recessed mounted



IP **20-54** With opal diffuser/
transparent

CRI **>80**

UGR **22**

105°


Photobiological safety

RG0	0 Risk free
RG1*	Low risk
RG2	Moderate risk
RG3	High risk


*Time under 3 h.

Expectancy
72000 h.
L70B10

Efficiency (%)
61,8

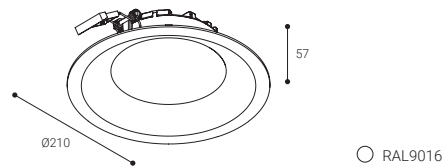

Opal diffuser



	W	K	LUMEN	COLOUR		PACKAGING
K23B	1x13W	3000	1750 lm	○	0,3	20
K24B	1x13W	4000	1850 lm	○	0,3	20
K25B	1x13W	5000	1880 lm	○	0,3	20



Compatible with **NormaLINK**

	W	K	LUMEN	COLOUR		PACKAGING
K23DB	1x13W	3000	1750 lm	○	0,3	20
K24DB	1x13W	4000	1850 lm	○	0,3	20
K25DB	1x13W	5000	1880 lm	○	0,3	20