

Sycom

SYCOM is a suspended lighting system that creates a distinctive geometry for each installation. The different modules can be combined in multiple ways.

Sycom



Ceiling suspended mounted
Direct





LED CE 55°C

IP
30


UGR
22

Expectancy
72000 h.
L70B10



○ RAL9016

Opal diffuser



	W	K	LUMEN	COLOUR	L(mm)	
SYS2L3B	1x26,8W	3000	3040 lm	○	584	3,9
SYS2L4B	1x26,8W	4000	3360 lm	○	584	3,9
SYS4L3B	1x53,6W	3000	6080 lm	○	1144	4,9
SYS4L4B	1x53,6W	4000	6720 lm	○	1144	4,9



Compatible with **NormaLINK**

	W	K	LUMEN	COLOUR	L(mm)	
SYS2L3DB	1x26,8W	3000	3040 lm	○	584	3,9
SYS2L4DB	1x26,8W	4000	3360 lm	○	584	3,9
SYS4L3DB	1x53,6W	3000	6080 lm	○	1144	4,9
SYS4L4DB	1x53,6W	4000	6720 lm	○	1144	4,9

Sycom Projector





Ceiling suspended mounted
Direct



LED CE 850°C


IP
20

UGR
19

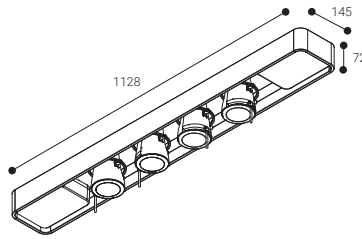


○ RAL9016

Opal diffuser



Transparent diffuser



	W	K	LUMEN	COLOUR	L(mm)	
SYP223OB	1x11,8W	3000	3860 lm	○	604	3,4
SYP223SB	1x11,8W	3000	3860 lm	○	604	3,4
SYP224OB	1x11,8W	4000	4100 lm	○	604	3,4
SYP224SB	1x11,8W	4000	4100 lm	○	604	3,4
SYP423OB	1x11,8W	3000	7720 lm	○	1128	6,8
SYP423SB	1x11,8W	3000	8860 lm	○	1128	6,8
SYP424OB	1x11,8W	4000	8200 lm	○	1128	6,8
SYP424SB	1x11,8W	4000	8200 lm	○	1128	6,8

Ref. O Opal diffuser. IP20. UGR22
Ref. S Transparent diffuser. IP20. UGR19




Sycom

ACCESSORIES


Suspension accessory

	L (m)	COLOUR
1029SYS	2	○
1029SYP	2	○

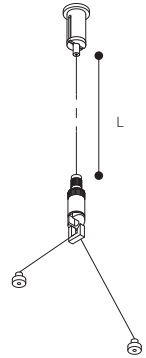

Connection box and power supply cable

	POWER SUPPLY CABLE LENGTH	COLOUR
ETC1029B	2	○
ETC10294MB	4	○



Joining accessory

	COLOUR
SY014B	○

