

U-Line

U-LINE is a minimalist linear system for suspended installation which can be integrated into any space surprisingly easily.

It has a 360° light rotation system that makes it an extremely versatile luminaire.

U-LINE can be installed in continuous strips by means of an installation accessory.


The luminaire consists of the power supply connection (available in different power and colors) and the light source itself (available in different powers and temperature colors).


REAL SIZE OF THE LUMINAIRE





U-Line

Installation	Ceiling suspended mounted
Diffuser	
Light source	LED
Photobiological safety	0
UGR	19
CRI	>80
MacAdam ellipse	3
Beam angle range	80
Power range (W)	23-34,6
Colour temperature (°K)	3000 4000
Light range	2480-3960
Power factor	0,95
Efficiency (%)	72
Expectancy	72000 h L70B10
DALI Option	✓
Continuous function 24h	✓
IP	30
Class	I

 Anti glare prismatic polycarbonate diffuser



For other CRI values, please contact us.

U-Line



Ceiling suspended mounted



LED CE ENEC 850°C

IP 30

CRI >80

UGR 19

80°



Expectancy
72000 h.
L70B10

Efficiency (%)
72

Photobiological safety

RG0	0 Risk free
RG1*	Low risk
RG2	Moderate risk
RG3	High risk


*Time under 3 h.



! For other lengths and powers, please contact us.

○ RAL9016
● RAL9005



Opal diffuser



	W	K	LUMEN	COLOUR	L(mm)	⚖️
UL43B	1x23W	3000	2480 lm	○	1200	1,4
UL43N	1x23W	3000	2480 lm	●	1200	1,4
UL44B	1x23W	4000	2640 lm	○	1200	1,4
UL44N	1x23W	4000	2640 lm	●	1200	1,4
UL63B	1x34,6W	3000	3720 lm	○	1760	2,0
UL63N	1x34,6W	3000	3720 lm	●	1760	2,0
UL64B	1x34,6W	4000	3960 lm	○	1760	2,0
UL64N	1x34,6W	4000	3960 lm	●	1760	2,0


! ULA power supply accessory not included

360° ROTATING

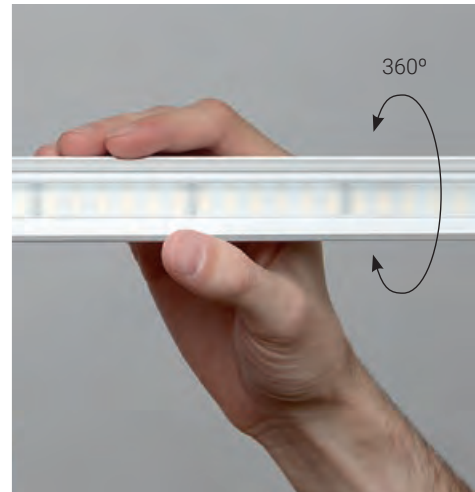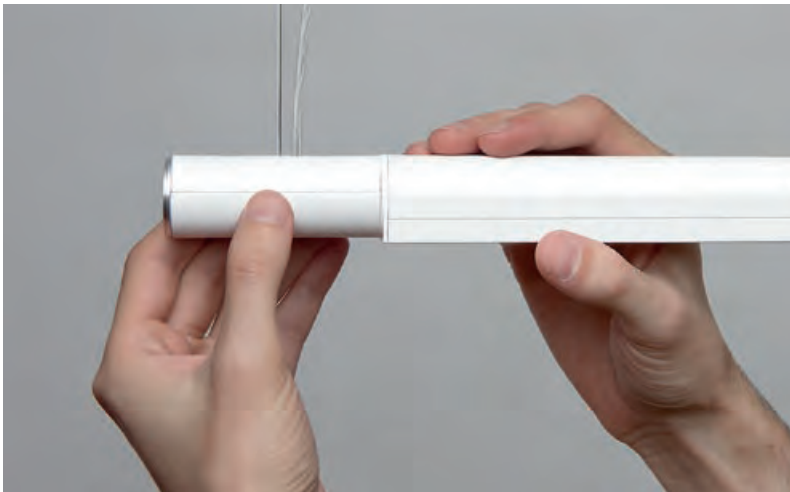

U-Line

Basic installation example: **ULA06N+UL43N**

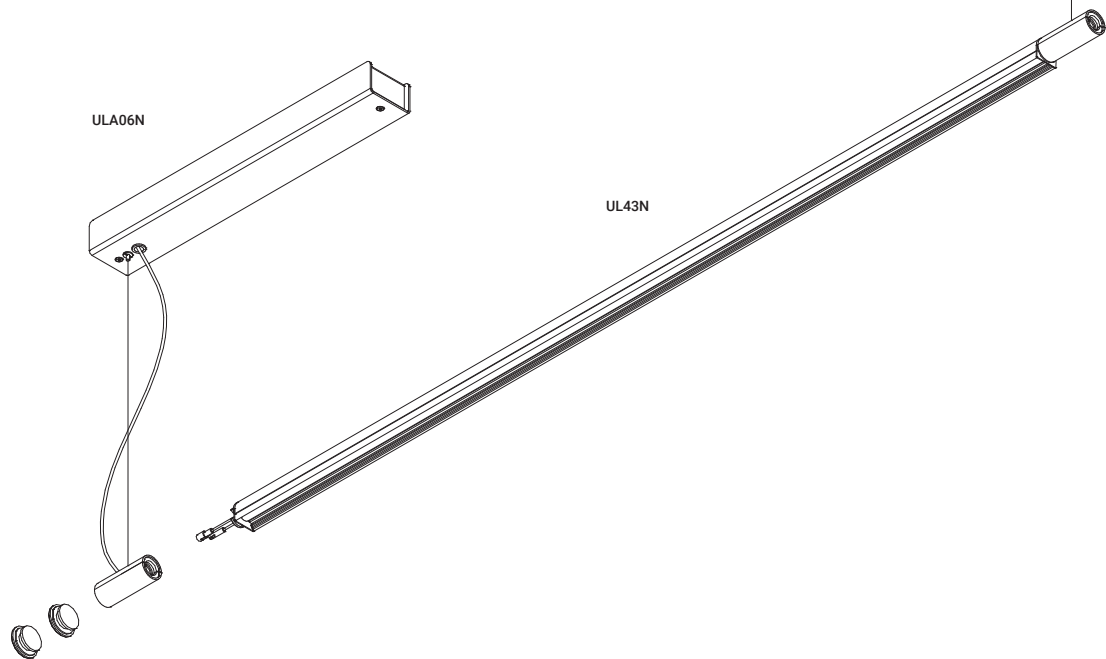

ACCESSORIES

Power supply


	W	L	COLOUR
ULA06B	35	70	○
ULA06N	35	70	●
ULA10B	60	70	○
ULA10N	60	70	●
ULA16B	96	70	○
ULA16N	96	70	●

Power supply

Compatible with **NormaLINK** 



	W	L	COLOUR
ULA06DB	35	70	○
ULA06DN	35	70	●
ULA10DB	60	70	○
ULA10DN	60	70	●
ULA16DB	100	70	○
ULA16DN	100	70	●

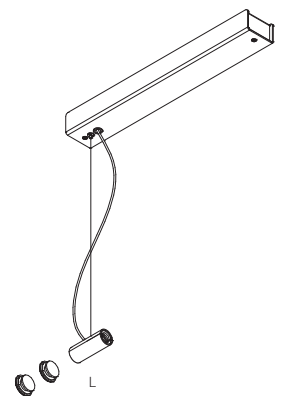

The number of power connections depends on the W in the installation.